


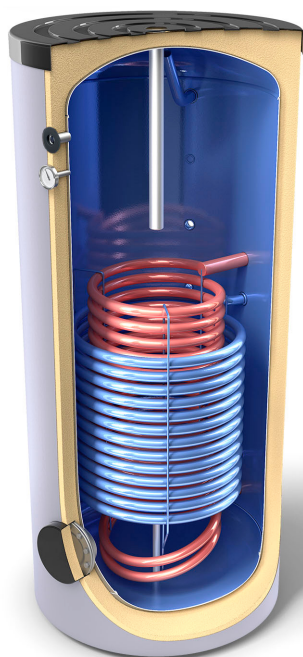

IHWTS FOR SOLAR/BOILER SYSTEMS IN
PARALLEL MODE

EV 12S+17S 500 75

Capacity	462 L
Net weight	164 kg
Insulation	50 mm
Heat exchanger surface S1	1.8 m ²
Heat exchanger surface S2	1.95
Heat exchanger capacity S1	11 L
Heat exchanger capacity S2	11.5 L
Heat losses ΔT 45K	95 W
Energy class	C
Maximum operational temperature	95 °C
Diameter	750 mm
Minimum height of the premise	1833 mm